


Technical specifications

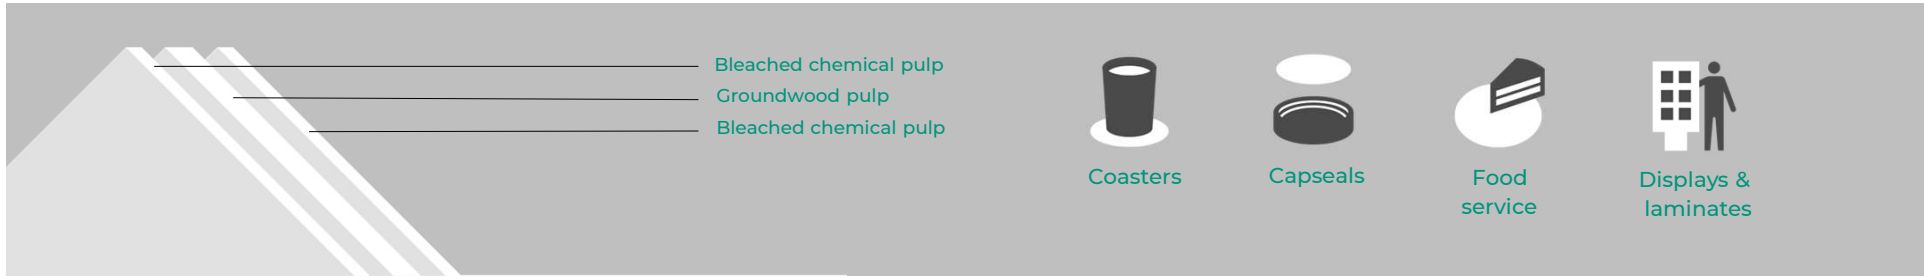

Typical technical values for PankaDisc

Property / Unit	Tolerance											Standards
Grammage, g/řh	± 4%	275*	305*	345*	375*	390	430	480	580	630		ISO 536
Thickness, µm	± 5%	620	700	800	850	900	1000	1150	1400	1550		ISO 534
Surface Smoothness, Bendtsen, ml/min		1500	1500	1600	1600	1600	1800	2000	2000	2000		ISO 8791-2

* Grammage produced upon special request, minimum production volume 20 tonnes

Tailor-made substances can be produced upon request, minimum production volume 20 tonnes

Properties not related to grammage

Property / Unit	Tolerance	Values	Standards
Moisture, %	± 1.5	8.0	ISO 287
ISO Brightness C/2°, %	± 1.5	75	ISO 2470-1
Scott Bond, J/mř	>90	90	TAPPI 569
Absorbency top, s		<30	
Absorbency reverse, s		<30	



Available as carbon neutral on request



For more information contact us